


SAFETY HOOK UP TO 38.5 kV

TYPE 862.040

TYPE 863.040

General Information

Insulating rod with safety hook is designed for free out of endangered space the person hit by electric current up to voltage 38.5 kV as maximum. Safety hook is made of glass-fabric laminate which suitable for its high electrical and mechanical resistance and stability. It fulfillthe requirements on the protection equipment for outdoor use. Insulating rode with safety hook is determined for indoor use, as well as for outdoor use under normal climatic conditions. The handle is provided with the protective ring (hand guard). Insulating part of 863.040 is connected by means of connecting element. Insulating rod with safety hook complies with standards ČSN 35 9701, DIN 57 681, IEC 832.

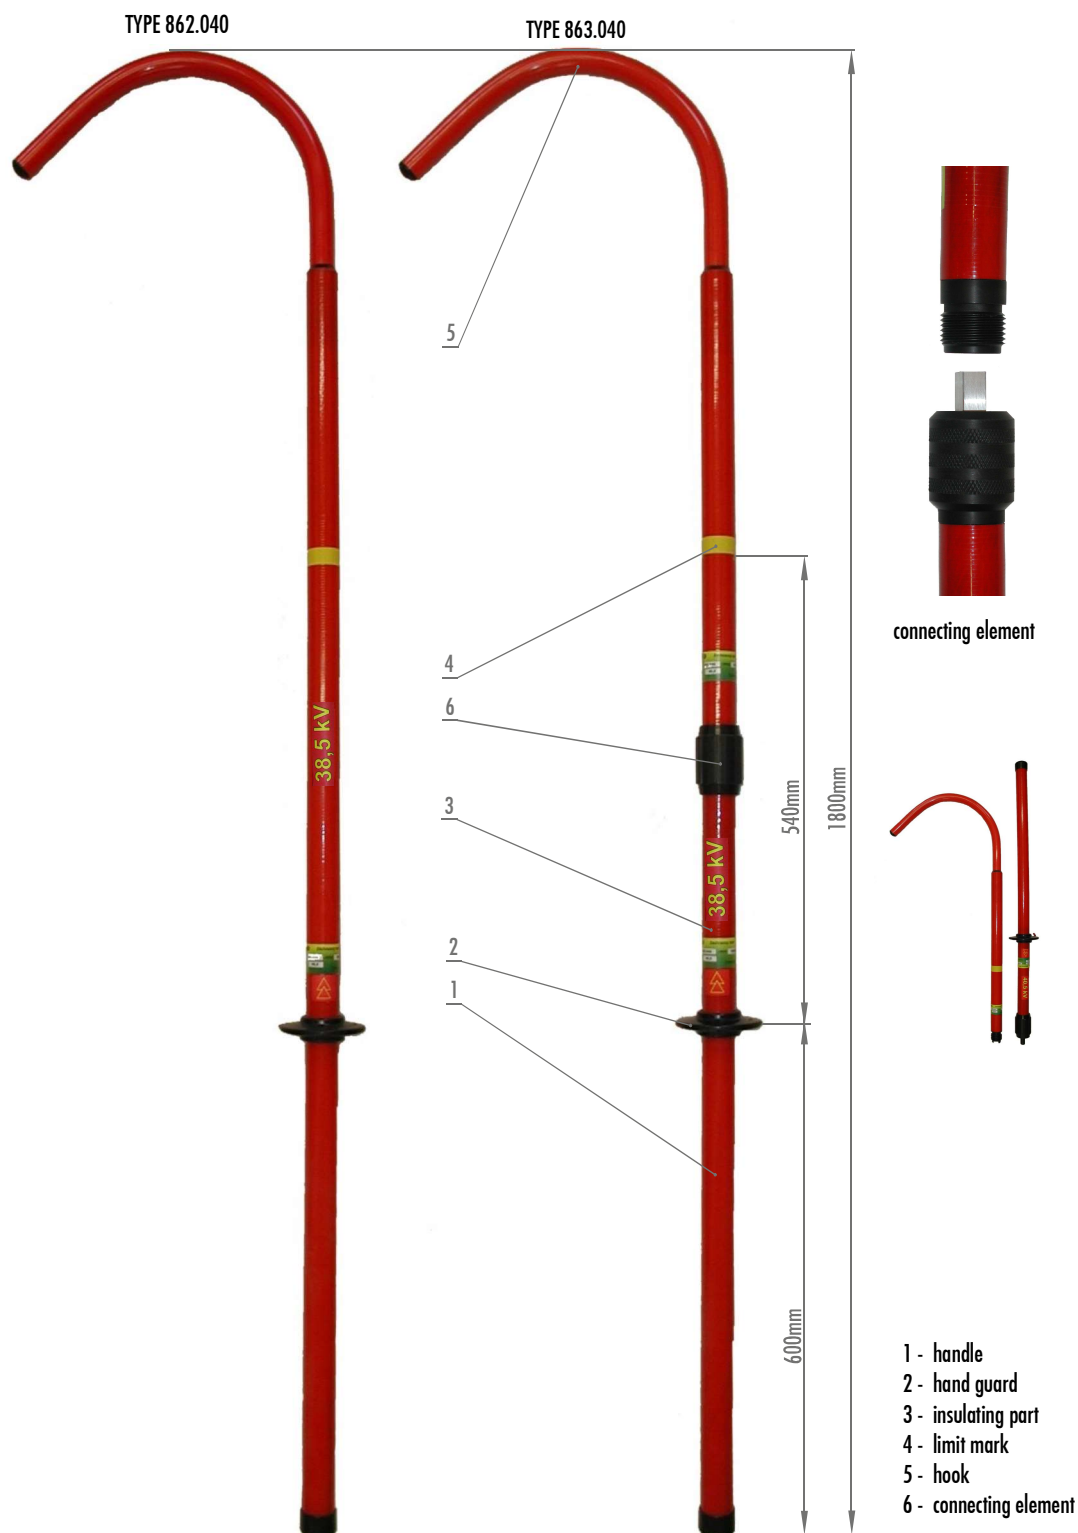

Technical Data

Length of equipment	1800 mm	Climatic group	normal - 25°C to 55°C
Length of handle	600 mm	Pole material	glass-fabric laminate for outdoor use
Pole diameter	31 mm hook	Mechanical firmness	500 N/1 min
	39 mm insulating rod	Weight of equipment	1 kg

The producer reserves the right to modify this item!

SAFETY HOOK
UP TO 38.5 kV
TYPE 863.040 4
TYPE 863.040 4

Directions for use

The safety hook serves to free out of endangered space the person hit by electric current up to voltage 38.5 kV as maximum. The disengagement is executed by locking and towing from endangered space. The handle is provided with the protecting rubber ring (hand guard). Isolating part of 863.040 is connected by means of connecting element. The safety hook is produced with the rod in all (862.040) or separated (863.040). The separated hook is suitable for the transport by car. It is necessary to connect isolating parts by means of connecting element before using, to check of stability of tightening and to perform the visual check of its status (863.040).

Instructions for current maintenance

The safety hook must be kept in condition, it must not be mechanically damaged. Its surface must be clean and dry. The visual check is necessary before using.

For common cleaning of the rods use damp cloth, for more resistance dirt use technical alcohol. Do not use any organic solvents or any substances which may have a decolorizing effect.

Testing


The safety hook is type-tested according to valid standards by the authorised laboratory. Each set is separately tested piece by piece before expedition and labeled too. The label includes the test date (quarter/year) and the number of the authorised laboratory. The safety hook must be periodically tested in accordance with standards.

Packing

The safety hook is expedited foil wrapped. There is enclosed the function description and the directions for use, the Certificate about quality and completeness of product and product test.

Guarantee

The guarantee period is 24 months long and starts on the day the product is delivered to the customer. It applies to any defects probably caused by the manufacture. The guarantee does not cover any defects resulting from improper use, unprofessional handling, or unsuitable storing.

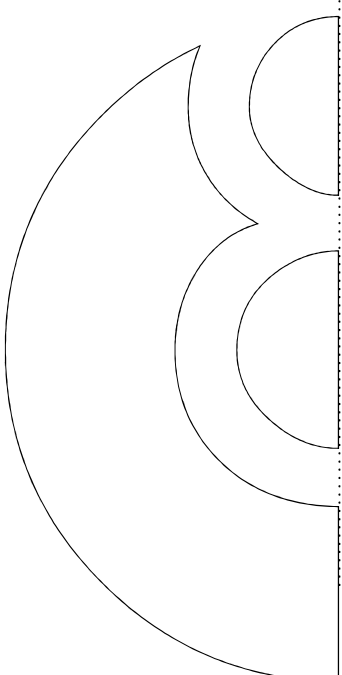

The producer reserves the right to modify this item!